





EXENTIA EFS

Digital Totem

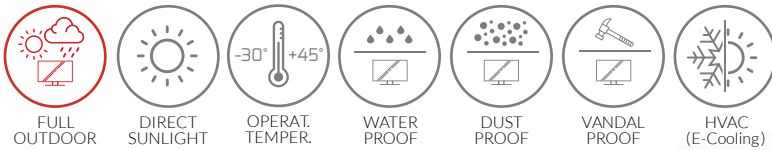

Exentia EFS Full-Outdoor is a 75" high brightness digital totem designed for outdoor advertising applications (DOOH) and Smart City solutions. Designed both in single and double-face, the Exentia EFS offers unparalleled visibility in all weather conditions. The High-brightness, up to 3000 nits, and the 1200:1 contrast ratio of the panel, ensure deep contrasts and vivid colors even under direct sunlight. The 24/7 use of the display is guaranteed by the robust anti-vandal structure in galvanized steel, with a 4+4 mm anti-reflection vandal proof frontal glass, and by the E-cooling technology, ensuring the operation in environmental temperature conditions from -30° to + 45°. The EFS is certified IP65, minimizing maintenance operations. The totems include a wide range of options available from touch screen to proximity sensor, and our own Octoplus Diagnostic Software, for remote network management and monitoring.

ADVANCED DIAGNOSTIC SYSTEM (DVP)

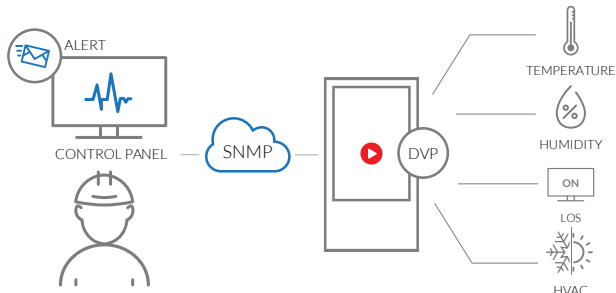

- SUNLIGHT READABLE
- HIGH BRIGHTNESS UP TO 3.000 NITS
- IP65 PROTECTION WITH ZERO MAINTENANCE
- 24/7 USAGE
- TEMPERATURE RANGE FROM -30°C TO +45°C
- ADVANCED DIAGNOSTIC SYSTEM
- EASY ACCESS FOR MAINTENANCE
- VANDAL PROOF STRUCTURE

DISPLAY SIZES



STRUCTURE AND MATERIALS

- Main structure in galvanized steel
- Antiglare safety 4+4 tempered glass
- Safety Lock and invisible screws and hinges
- Fixture to the floor
- Vandal proof grade structure (IK08)
- 2 access compartment for easy maintenance


COLORS AND FINISHES



Various varnish colors available
Client logo customization

OPTIONS

● Available ● Not Available ● Included

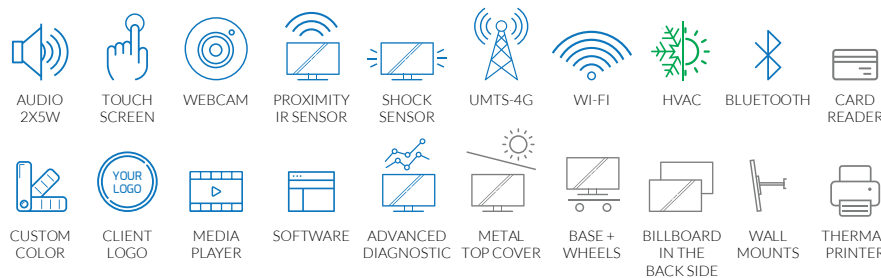

TESTS AND CERTIFICATIONS





TECHNICAL SPECIFICATIONS

General

Product code	EFS.P75HBE (Portrait)
Screen size (inch)	75"
Screen active area (cm)	92,8 X 164,9
Display brightness (nits)	up to 3000
Backlight technology	LED
Screen resolution (pixel)	4K - 3840x2160
Contrast ratio	1200:1 (typ)
Viewing angle (H/V)	178° / 178°
Backlight Life cycle	50.000 hours
System operation	24/7/365
Screen orientation	Portrait
Screen side	Single and Double
Interactive touch	Projected capacitive (optional)

Environment

Environment rating	Full-Outdoor IP65 (Nema 4X)
Operating temperature	-30°C (*) / +45°C
Environment humidity	10% - 90%
Antivandal protection	IK08

Enclosure


Air cooling system	E-cooling
Standard color	Black (RAL9005) - Gray (RAL9006)
Enclosure material	Galvanized steel
Glass	Laminated glass (4mm + 4mm)
Glass reflection	Anti-reflection

Power

Vac supply	230V AC +/- 10
Power consumption (Typ)	2.050W (single side) 4.050W (double side)

Dimensions

Height (cm)	250
Width (cm)	121
Depth (cm) [DoubleSide]	38,5 - [38,5]
Weight (Kg) [DoubleSide]	390 - [440]
Base dimensions (cm)	n.a.
Notes	(*) -30°C only w/ heater (normally -10°C)

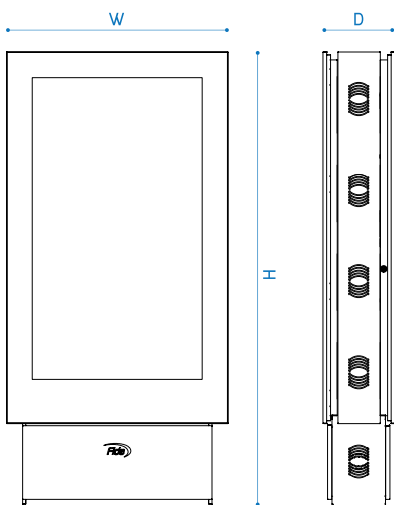

Frontal Door with hinges on the Right (Left hinges upon request).

BACKLIGHT POSTER AVAILABLE ON THE BACKSIDE



BACKLIGHT CUSTOM LOGO AVAILABLE