





# THILE




## THM

Monitor  
Indoor

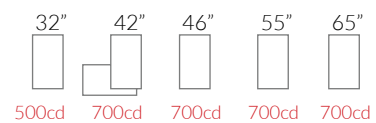

## THK

Digital Totem  
Indoor

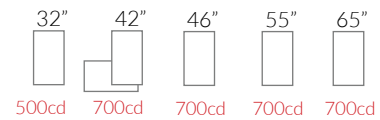




THILE

THM

Monitor

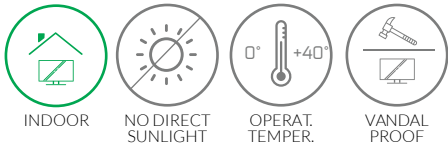


The indoor THM monitor is particularly suitable for dynamic message applications in retail. Display size ranges from 32" to 65" with or without touch, with an ultra slim profile and only 5 cm depth, including housing for media player, electrical components making it one of the slimmest units on the market. A rich range of options available such as touch, proximity sensor, and Wi-Fi make it the perfect solution for any shop or retail location. The THM has a security locking system that prevents it from theft, additionally the all frontal tempered anti-vandal proof glass protects it from any vandalism or use of aggressive cleaning agents possibly ruining the LCD.

MEDIA SOLUTIONS


1

Built-in Player w/Free Software

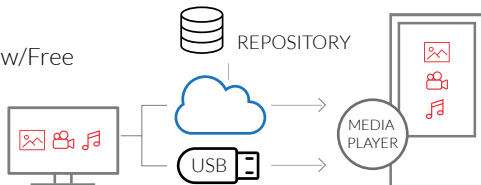


2

PC-based w/Full DS Platform

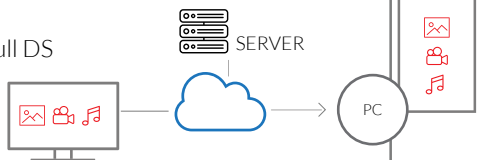

- 700 NITS BRIGHTNESS
24/7 USAGE
4mm TEMPERED ALL FRONTAL GLASS
SUPER SLIM DESIGN
READY FOR PC OR MEDIAPLAYER INSIDE
INVISIBLE BRACKETS
HIGH QUALITY FINISHINGS
PCAP TOUCH AVAILABLE

DISPLAY SIZES



STRUCTURE AND MATERIALS

- Structure in Satin Stainless Steel
Safety 4mm tempered glass
Easily accessible hidden USB port
Thin enclosure
Vandal proof grade structure (IK04)
Special wall bracket with integrated lock


COLOR AND FINISHING



Various varnish colors available
Client logo customization

OPTIONS


Available Not Available Included

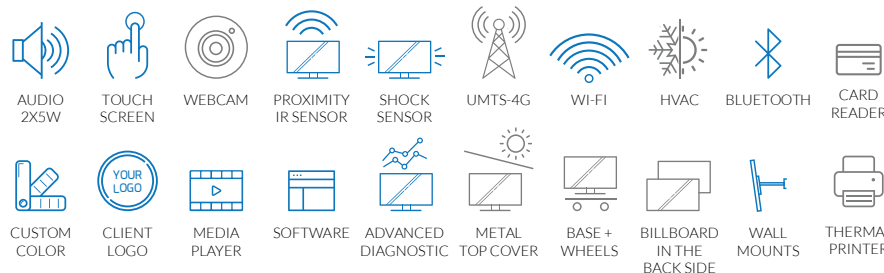



TESTS AND CERTIFICATIONS



LVD 2014/35/UE
EMC 2014/30/UE
ROHS 2011/65/UE
IP Code IEC 60529
IK Rating IEC 62262
Safety of Information Technology Equipment: IEC 60950-1
Safety Requirements of Audio, Video and Similar Electronic Apparatus: IEC 60065

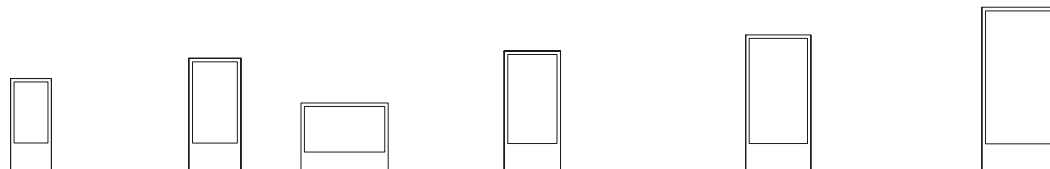

General	THM.P32 (Portrait)	THM.P42 (Portrait)	THM.L42 (Landscape)	THM.P46 (Portrait)	THM.P55 (Portrait)	THM.P65 (Portrait)
Product code	THM.P32 (Portrait)	THM.P42 (Portrait)	THM.L42 (Landscape)	THM.P46 (Portrait)	THM.P55 (Portrait)	THM.P65 (Portrait)
Screen size (inch)	32"	42"		46"	55"	65"
Screen active area (cm)	39,2 X 69,8	52,4 X 93,1		57,2 X 101,9	68,1 X 121	80,3 X 142,8
Display brightness (nits)	500	700		700	700	700
Backlight technology	LEDedge	LEDedge		LEDedge	LEDedge	LEDedge
Screen resolution (pixel)	Full HD - 1920x1080	Full HD - 1920x1080		Full HD - 1920x1080	Full HD - 1920x1080	Full HD - 1920x1080
Contrast ratio	3000:1 (typ)	4000:1 (typ)		4000:1 (typ)	4000:1 (typ)	4000:1 (typ)
Viewing angle (H/V)	178° / 178°	178° / 178°		178° / 178°	178° / 178°	178° / 178°
Backlight Life cycle	50.000 hours	50.000 hours		50.000 hours	50.000 hours	50.000 hours
System operation	24/7/365	24/7/365		24/7/365	24/7/365	24/7/365
Screen orientation	Portrait	Portrait	Landscape	Portrait	Portrait	Portrait
Screen side	Single	Single		Single	Single	Single
Interactive touch	Projected capacitive (optional)	Projected capacitive (optional)	Projected capacitive (optional)	Projected capacitive (optional)	Projected capacitive (optional)	Projected capacitive (optional)
Environment rating	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)
Operating temperature	0°C / +40°C	0°C / +40°C		0°C / +40°C	0°C / +40°C	0°C / +40°C
Environment humidity	10% - 80%	10% - 80%		10% - 80%	10% - 80%	10% - 80%
Antivandal protection	IK04	IK04		IK04	IK04	IK04
Air cooling system	n.a.	n.a.		n.a.	n.a.	n.a.
Standard color	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)
Enclosure material	Stainless Steel	Stainless Steel		Stainless Steel	Stainless Steel	Stainless Steel
Glass	Tempered glass (4mm)	Tempered glass (4mm)		Tempered glass (4mm)	Tempered glass (4mm)	Tempered glass (4mm)
Glass reflection	No Anti-glare treatment	No Anti-glare treatment		No Anti-glare treatment	No Anti-glare treatment	No Anti-glare treatment
Vac supply	230V AC +/- 10 (*)	230V AC +/- 10		230V AC +/- 10	230V AC +/- 10	230V AC +/- 10
Power consumption (Typ)	80W	105W		120W	135W	240W
Height (cm)	107	130	82	138	156	190
Width (cm)	47	60	101	65	75	95
Depth (cm)	5	5	5	5	5	6
Weight (Kg)	19	23	25	26	35	62

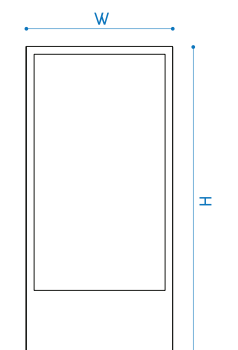

Frontal Door with hinges on the Top.

32" 42" 46" 55"



700cd

65"




700cd

(\*) Elevator Special Version +24V DC



# THILE THK

## Digital Totem

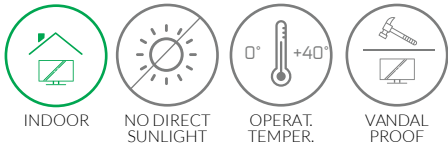


With the Totem THK we wanted to make the impossible possible: enclose in only 10 cm all components necessary for a double sided digital signage kiosk. The result: a super slim indoor kiosk that is light yet powerful at the same time. No screws in sight, with all frontal 4 mm glass, double closure for security and anti-vandalism with an infinite amount of colors and finishes. Created specifically for prestigious locations such as banks, museums, or meeting rooms. All totems can have capacitive touch with 2 or 40 touches, transforming it into an effective wayfinding solution or information point for hospitals and fairs or as a welcome system for companies or hotels.

### MEDIA SOLUTIONS


1

Built-in Player w/Free Software

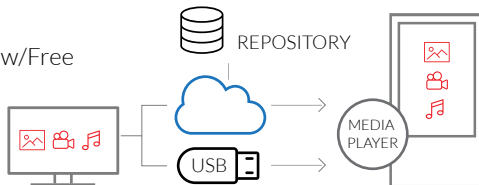


2

PC-based w/Full DS Platform

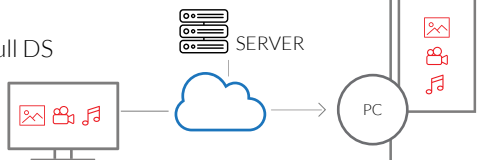

- 700 NITS BRIGHTNESS
- 24/7 USAGE
- 4mm TEMPERED ALL FRONTAL GLASS
- SAME DEPTH FOR SINGLE AND DOUBLE SIDED
- NO VISIBLE SCREWS
- HIGH QUALITY FINISHES
- PCAP TOUCH AVAILABLE
- SMALL FOOTPRINT

### DISPLAY SIZES



### STRUCTURE AND MATERIALS

- Structure in Satin Stainless Steel
- Safety 4mm tempered glass
- Safety Lock and invisible screws and hinges
- Thin enclosure and footprint
- Vandal proof grade structure (IK04)
- Standard floor support base

### COLOR AND FINISHING



Various varnish colors available  
Client logo customization

### OPTIONS

● Available   ● Not Available   ● Included


AUDIO 2X5W	TOUCH SCREEN	WEBCAM	PROXIMITY IR SENSOR	SHOCK SENSOR	UMTS-4G	WI-FI	HVAC	BLUETOOTH	CARD READER
CUSTOM COLOR	CLIENT LOGO	MEDIA PLAYER	SOFTWARE	ADVANCED DIAGNOSTIC	METAL TOP COVER	BASE + WHEELS	BILLBOARD IN THE BACK SIDE	WALL MOUNTS	THERMAL PRINTER

### TESTS AND CERTIFICATIONS



LVD 2014/35/UE  
EMC 2014/30/UE  
ROHS 2011/65/UE  
IP Code IEC 60529  
IK Rating IEC 62262  
Safety of Information Technology Equipment:  
IEC 60950-1  
Safety Requirements of Audio, Video and Similar  
Electronic Apparatus: IEC 60065



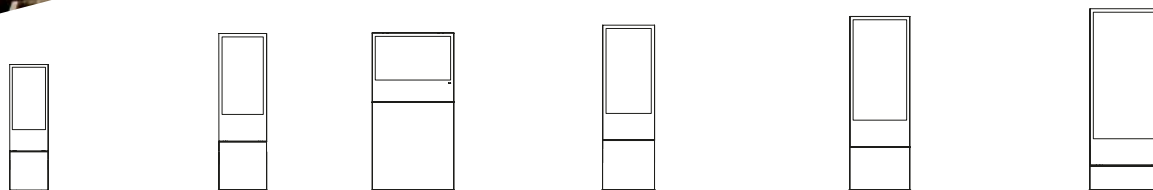

## TECHNICAL SPECIFICATIONS


General

Product code	THK.P32 (Portrait)	THK.P42 (Portrait)	THK.L42 (Landscape)	THK.P46 (Portrait)	THK.P55 (Portrait)	THK.P65 (Portrait)
Screen size (inch)	32"	42"		46"	55"	65"
Screen active area (cm)	39,2 X 69,8	52,4 X 93,1		57,2 X 101,9	68,1 X 121	80,3 X 142,8
Display brightness (nits)	500	700		700	700	700
Backlight technology	LEDedge	LEDedge		LEDedge	LEDedge	LEDedge
Screen resolution (pixel)	Full HD - 1920x1080	Full HD - 1920x1080		Full HD - 1920x1080	Full HD - 1920x1080	Full HD - 1920x1080
Contrast ratio	3000:1 (typ)	4000:1 (typ)		4000:1 (typ)	4000:1 (typ)	4000:1 (typ)
Viewing angle (H/V)	178° / 178°	178° / 178°		178° / 178°	178° / 178°	178° / 178°
Backlight Life cycle	50.000 hours	50.000 hours		50.000 hours	50.000 hours	50.000 hours
System operation	24/7/365	24/7/365		24/7/365	24/7/365	24/7/365
Screen orientation	Portrait	Portrait		Portrait	Portrait Portrait	Portrait
Screen side	Single and Double	Single and Double		Single and Double	Single and Double	Single and Double
Interactive touch	Projected capacitive (optional)	Projected capacitive (optional)		Projected capacitive (optional)	Projected capacitive (optional)	Projected capacitive (optional)
Environment rating	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)		Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)	Indoor IP20 (Nema 1)
Operating temperature	0°C / +40°C	0°C / +40°C		0°C / +40°C	0°C / +40°C	0°C / +40°C
Environment humidity	10% - 80%	10% - 80%		10% - 80%	10% - 80%	10% - 80%
Antivandal protection	IK04	IK04		IK04	IK04	IK04
Air cooling system	n.a.	n.a.		n.a.	n.a.	n.a.
Standard color	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)		Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)	Satin StainlessSteel Black (RAL9005) White (RAL9010)
Enclosure material	Stainless Steel	Stainless Steel		Stainless Steel	Stainless Steel	Stainless Steel
Glass	Tempered glass (4mm)	Tempered glass (4mm)		Tempered glass (4mm)	Tempered glass (4mm)	Tempered glass (4mm)
Glass reflection	No Anti-glare treatment	No Anti-glare treatment		No Anti-glare treatment	No Anti-glare treatment	No Anti-glare treatment
Vac supply	230V AC +/- 10	230V AC +/- 10		230V AC +/- 10	230V AC +/- 10	230V AC +/- 10
Power consumption (Typ)	80W (single side) 160W (double side)	105W (single side) 210W (double side)		120W (single side) 240W (double side)	135W (single side) 270W (double side)	240W (single side) 480W (double side)
Height (cm)	180	190		200	210	209
Width (cm)	47	60	100	65	75	95
Depth (cm) [DoubleSide]	10 - [10]	10 - [10]		10 - [10]	10 - [10]	15 - [15]
Weight (Kg) [DoubleSide]	62 - [84]	85 - [103]	125 - [145]	107 - [140]	116 - [156]	142 - [210]
Base dimensions (cm)	47(W)x0,6(H)x55(D)	60(W)x0,6(H)x55(D)	104(W)x0,6(H)x55(D)	65(W)x0,6(H)x55(D)	75(W)x0,6(H)x55(D)	95(W)x1(H)x65(D)

Environment

Enclosure

Power  
Dimensions

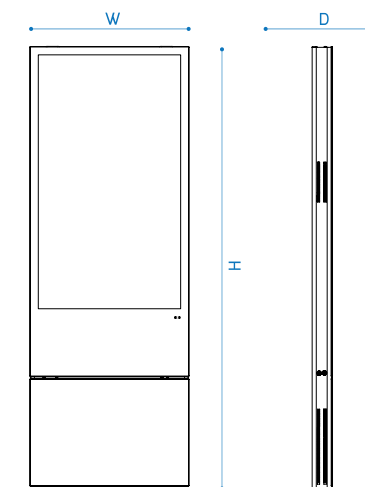

Frontal Door with hinges on the Top.

32" 42" 46" 55"



700cd

65"



700cd



### Milan

**Headquarter**  
Via Volturmo 135 - 20861  
Brugherio (MB) - Italy

**Fida srl**  
T. + 39 039 878733  
F. + 39 039 882003  
sales@fida.it  
www.fida.it

### Rome

**Branch Office**  
Piazza Flavio Biondo 7 - 00153  
Roma (RM) - Italy