




SIGNUM

SKO Digital Totem

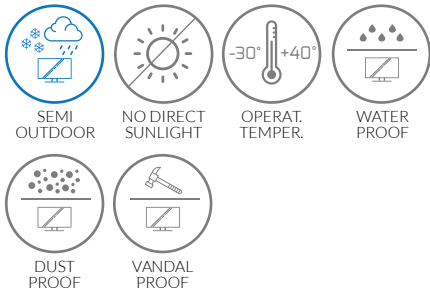

The Totem SKO semi-outdoor LCD TFT consists of a self-supporting frame in brushed stainless steel, available in both single or double-sided version with hinged doors that open, containing the protective glass. From here you access the electronics and the TFT LCD panel, arranged vertically and available in sizes 55" and 65". The display does not have headers or predefined fields, so you have full flexibility in decided free text pages, ancillary information etc. All elements of the enclosure can be personalized and a suitable surface finish that allows the elimination of graffiti can be used. FIDA always uses the latest generation TFT LCD panels with backlit LED that help reduce power consumption. A sophisticated diagnostic system allows you to control various parameters and settings such as temperature, humidity, ventilation, and external brightness. The control electronics utilizes a Linux operating system, that is extremely stable and reliable, immune to accidental electrical interruptions or viruses.



- Major Features**
- HIGH QUALITY FINISHES
 - TEMPERATURE RANGE FROM -30°C TO +40°C
 - EASY ACCESS FOR MAINTENANCE
 - 24/7 USAGE
 - ADVANCED DIAGNOSTIC SYSTEM
 - DUST AND WATER PROTECTION
 - 4+3MM VANDAL PROOF GLASS
 - READY FOR CAMERA, NFC, AUDIO AND PROXIMITY SENSOR

STRUCTURE AND MATERIALS


- Main structure in stainless steel
- Antiglare safety 4+3 tempered glass
- Safety Lock and invisible screws and hinges
- Vandal proof grade structure (IK08)
- Possibility to install interactive devices like webcam, card readers, sensors etc.

DISPLAY SIZES



OPTIONS


● Available ● Not Available ● Included ● On project

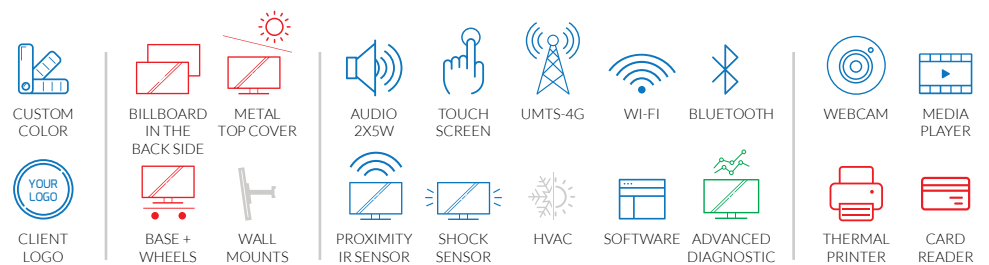




TECHNICAL SPECIFICATIONS

General	SKO.P55 (Portrait)	SKO.P65 (Portrait)
Product code	SKO.P55 (Portrait)	SKO.P65 (Portrait)
Screen size (inch)	55"	65"
Screen active area (cm)	68,1 X 121	80,3 X 142,8
Display brightness (nits)	700	700
Backlight technology	LEDedge	LEDedge
Screen resolution (pixel)	Full HD - 1920x1080	Full HD - 1920x1080
Contrast ratio	4000:1 (typ)	4000:1 (typ)
Viewing angle (H/V)	178° / 178°	178° / 178°
Backlight Life cycle	50.000 hours	50.000 hours
System operation	24/7/365	24/7/365
Screen orientation	Portrait	Portrait
Screen side	Single and Double	Single and Double
Interactive touch	Projected capacitive (optional)	Projected capacitive (optional)
Environment rating	Full-Outdoor IP55 (Nema 3S)	Full-Outdoor IP55 (Nema 3S)
Operating temperature	-30°C (*) / +40°C	-30°C (*) / +40°C
Environment humidity	10% - 90%	10% - 90%
Antivandal protection	IK08	IK08
Air cooling system	Ventilation	Ventilation
Standard color	Black (RAL9005) - Gray (RAL9006)	Black (RAL9005) - Gray (RAL9006)
Enclosure material	Stainless Stell	Stainless Stell
Glass	Laminated glass (4mm + 3mm)	Laminated glass (4mm + 3mm)
Glass reflection	Anti-reflection	Anti-reflection
Vac supply	230V AC +/- 10	230V AC +/- 10
Power consumption (Typ)	185W (single side) 370W (double side)	290W (single side) 580W (double side)
Dimensions		
Height (cm)	216	239
Width (cm)	91,5	104,5
Depth (cm) [DoubleSide]	20,5 - [20,5]	20,5 - [20,5]
Weight (Kg) [DoubleSide]	280 - [315]	300 - [350]
Base Dimensions (cm)	148(W)x18,4(H)x58(D)	148(W)x18,4(H)x58(D)
Notes	(*) -30°C only w/ heater (normally -10°C)	(*) -30°C only w/ heater (normally -10°C)

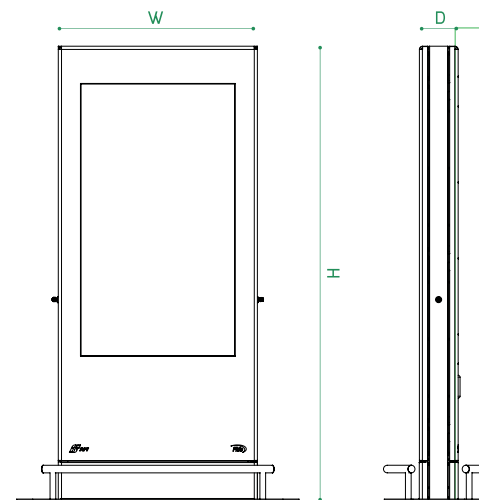

STANDARD COLORS AND FINISHING

Enclosure Colors ● Light Grey RAL 9006
 On request

TESTS AND CERTIFICATIONS

LVD 2014/35/UE
 EMC 2014/30/UE
 ROHS 2011/65/UE
 IP Code IEC 60529
 IK Rating IEC 62262
 FS CAP IV 2015
 EMC EN 50293

Environmental Test: IEC 60068-2-1; IEC 60068-2-14
 Safety: IEC60950-1
 Random Vibration Test: IEC 60068-2-64
 EN 55014 - EN 55022 - EN 61000-3 - EN 61000-4



NOTE

Frontal Door with hinges on the Right.
 (Left hinges upon request).

For more information visit www.fida.it
 Copyright © 2019 Fida srl