




# TACTIVE

## TSI

### SelfKiosk



Tactive SelfKiosk TSI, with 10 touch PCAP, is very robust thanks to the steel structure and the metal vandal proof keypad. The TSI 22" landscape version is very useful as a multifunctional tool for self-service applications thanks to a wide range of options available. The frontal panel is equipped for transactions useful in banks, post offices or in airports for customs transits. If equipped with a credit card reader and thermal printer, it becomes the perfect payment point for fast food restaurants or pharmacies. While thanks to a high resolution webcam and unidirectional 2x10w audio system you can use it as an interactive terminal or corporate receptionist.



## Major Features

- SUITABLE FOR SELF-SERVICE APP**
- METAL KEYBOARD AS STANDARD**
- FULLY CUSTOMIZABLE**
- 24/7 USAGE**
- SMALL FOOTPRINT**
- WIDE RANGE OF DEVICES INTEGRATION**
- EASY ACCESS FOR MAINTENANCE**
- ROBUST AND RELIABLE**

### STRUCTURE AND MATERIALS





















- Structure in steel
- Back-door
- Ergonomic design
- Double safety locks
- Custom frontal panel for various devices such as Printers, Card Reader and Webcam
- Optional base with wheels

### DISPLAY SIZES



### OPTIONS


● Available ● Not Available ● Included ● On project

 CUSTOM COLOR	 AUDIO 2X5W	 TOUCH SCREEN	 UMTS-4G	 WI-FI	 BLUETOOTH	 WEBCAM	 MEDIA PLAYER	 CARD READER	 BARCODE READER
 CLIENT LOGO	 PROXIMITY IR SENSOR	 SHOCK SENSOR	 HVAC	 SOFTWARE	 ADVANCED DIAGNOSTIC	 BASE + WHEELS	 CASHLESS PAYMENT	 A4 THERMAL PRINTER	 80mm THERMAL PRINTER



## TECHNICAL SPECIFICATIONS

General	Product code	<b>TSI.L22</b> (Landscape)
	Screen size (inch)	22"
	Screen active area (cm)	47,6 X 26,8
	Display brightness (nit)	300
	Backlight technology	LEDedge
	Screen resolution (pixel)	Full HD - 1920x1080
	Contrast ratio	1000:1 (typ)
	Viewing angle (H/V)	178° / 178°
	Backlight Life cycle	50.000 hours
	System operation	24/7/365
	Screen orientation	Landscape
	Screen side	Single
	Interactive touch	Projected capacitive 10t
Environment	Environment protection	Indoor - IP20 (Nema 1)
	Operating temperature	0°C / +40°C
	Environment humidity	10% - 80%
	Antivandal protection	IK04
Enclosure	Air cooling system	n.a.
	Standard color	As shown below
	Enclosure material	Steel
Dimensions Power	Glass	Scratch-free glass (4mm)
	Glass reflection	Anti-reflection
	Vac supply	230V AC +/- 10
	Power consumption (Typ)	70W
	Height (cm)	155
	Width (cm)	60
	Depth (cm)	52
Weight (Kg)	67	
Base dimensions (cm)	62(W)x5(H)x40(D)	

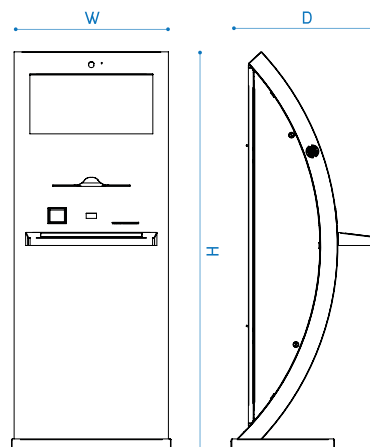

A4 camera scanner



## STANDARD COLORS AND FINISHING

Enclosure Colors ● Black RAL 9005 ● Light Grey RAL 9006 ● On request  
Glass Colors ○ Not Available

## TESTS AND CERTIFICATIONS

LVD 2014/35/UE  
EMC 2014/30/UE  
ROHS 2011/65/UE  
IP Code IEC 60529  
IK Rating IEC 62262

Safety of Information Technology Equipment:  
IEC 60950-1  
Safety Requirements of Audio, Video and Similar  
Electronic Apparatus: IEC 60065



## NOTE

Frontal Door with hinges on the Right.  
(Left hinges upon request).